RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

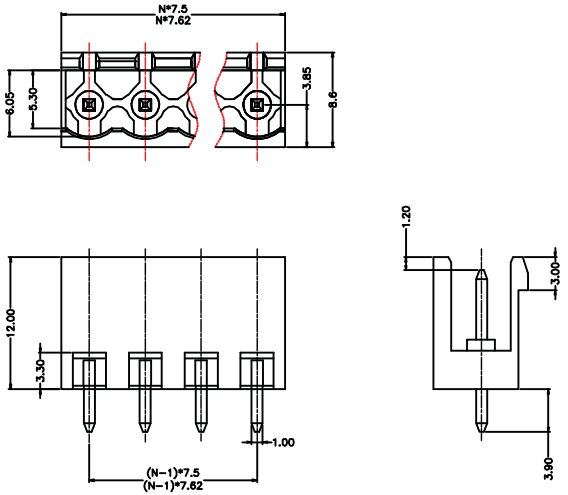

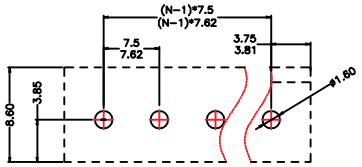

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

N=No.of contacts

SPECIFICATION

MATERIAL

Housing:PA66,UL94V-0

Pin Header:Brass,Tin Plated

ELECTRICAL

Rated voltage:300V

Rated current: 15A

Withstanding voltage: AC4000V/ 1Min

MECHANICAL

Operating Temperature:-40°C~+105°C

订购方式/HOW TO ORDER

□ □ □ P — □ — □ — 客户需求 Customer Request

型号 Series NO.

极数 NO.of Pole

间距 Pitch

1	单间距 Single Pitch
2	双间距 Double Pitch

颜色 Color

1	灰色 Grey
2	蓝色 Blue
3	黑色 Black
4	绿色 Green

Contact Us

TEL:+86－574－63510149　　FAX:+86－574－63516735

E-Mail:Sales@cxsuteng.com　　Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 DATE	2012.07.10		

慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD

单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGV—7.5/7.62
角法 VIEW		设计 DESIGN	No.06		
比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST2EDGV—7.5/7.62
版本 VER	A0	核准 APPD		图号 DRAW NO.	ST2EDGV—7.5/7.62