

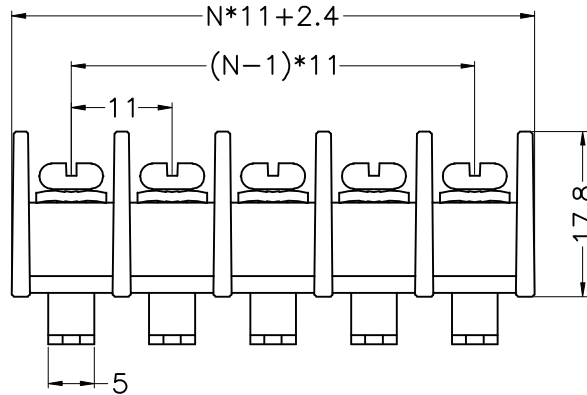



RoHS Compliant Customer Drawing

| REV. | ECN NO. | DESCRIPTION | DATE | DESIGN |
|------|---------|-------------|------|--------|
|      |         |             |      |        |

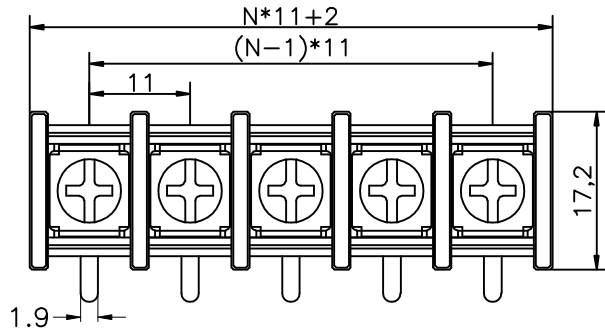

- 材质及电镀(Material)  
 塑件(Housing): PA66, UL94V-0  
 端子(Terminal): 黄铜, 1.0t 镀锡(Brass, Tin plated)  
 螺丝(Screw): M4, 钢, 镀镍(Steel, Ni-Plated)
- 电气性能(Electrical)  
 额定电压(Rated Voltage): 300V  
 额定电流(Rated Current): 25A  
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V  
 耐电压(Withstanding Voltage): AC2000V/Min
- 机械性能(Mechanical)  
 温度范围(Temperature Range): -40℃~ +105℃  
 适用线径(Wire Range): 22-14AWG  
 最大扭矩值(Max. Torque Value): 0.5N.m 4.4Lb.in

订购方式/HOW TO ORDER

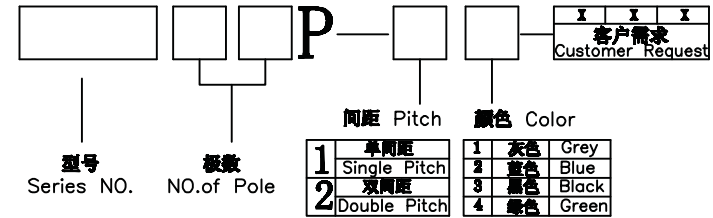

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735  
 E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

N=No. of contacts

| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       |       |       | 慈溪市速腾电子有限公司<br>SUTOWN CIXI SUTENG ELECTRONIC CO., LTD |            |               |       |                  |            |
|-------------------------------------|-------|-------|-------|---|------------|---------------|-------|------------------|------------|
| X.                                  | ±0.25 | X°    | ±5°   | 单位<br>UNITS   | mm         | 制图<br>DRAWING | No.01 | 产品名称<br>TITLE    | ST65R-11.0 |
| .X                                  | ±0.20 | .X°   | ±2°   | 角法<br>VIEW  | 第一角法       | 设计<br>DESIGN  | No.06 | 产品料号<br>PART NO. | ST65R-11.0 |
| .XX                                 | ±0.15 | .XX°  | ±1°   | 比例<br>SCALE   | 1:1        | 审核<br>CHECK   |       | 图号<br>DRAW NO.   | ST65R-11.0 |
| .XXX                                | ±0.02 | .XXX° | ±0.5° | 日期<br>DATE  | 2012.07.10 | 版本<br>APPD    | A0    |                  |            |